


REPLACEMENT PARTS SUITABLE FOR:

PT-40[®]



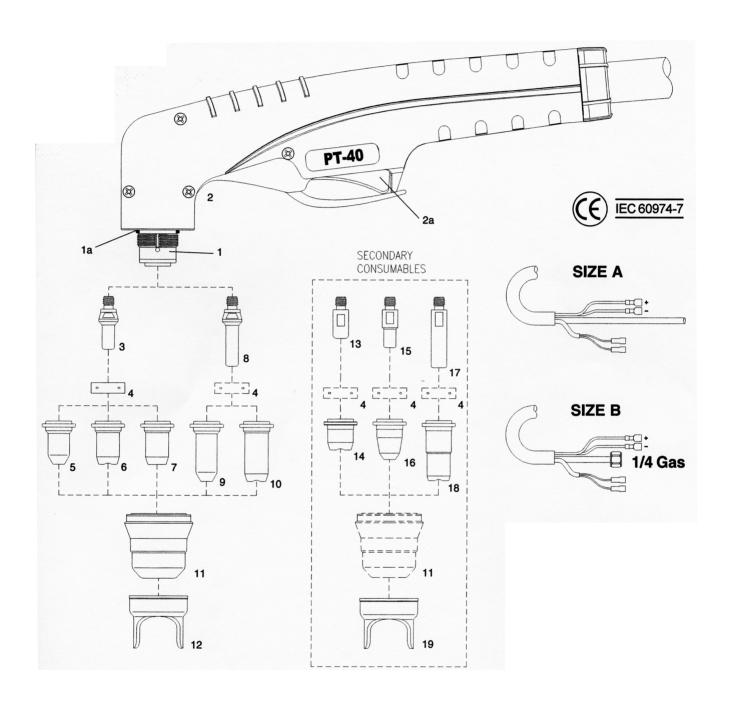

REPLACEMENT PARTS SUITABLE FOR:

PT-40[®]

ITEM	CATALOG NUMBER	DESCRIPTION	STD. QTY
1	CS09602	PT-40 70° TORCH HEAD	
1a	CS51620.60	O-RING	
2	CS09605	HANDLE WITH SWITCH	
2a	CS07301.20	SWITCH	
3	CS52482	ELECTRODE BACK STRIKING	
4	CS60028	GAS DISTRIBUTOR	
5	CS51318.06	TIP CONTAC CUTTING Ø0.65 10-20A BACK STRIKING	
	CS51318.08	TIP CONTAC CUTTING Ø0.8 20-30A BACK STRIKING	
	CS51308.09	TIP CONTAC CUTTING Ø0.9 30-40A BACK STRIKING	
6	CS51312P.09	TIP CONTAC CUTTING Ø0.9 30-40A BACK STRIKING	
7	CS51313P.09	FLAT TIP CUTTING Ø0.9 30-40A BACK STRIKING	
	CS51313.P10	FLAT TIP CUTTING Ø1.0 40-50A BACK STRIKING	
8	CS52583	EXTENDED ELECTRODE BACK STRIKING	
9	CS51318L.06	EXTENDED TIP CONTAC CUTTING Ø0.65 10-20A BACK STRIKING	
	CS51318L.08	EXTENDED TIP CONTAC CUTTING Ø0.8 20-30A BACK STRIKING	
10	CS51314.09	EXTENDED TIP CONTAC CUTTING Ø0.9 30-40A BACK STRIKING	
11	CS60389	RETAINING CAP 6 HOLES	
	CS60389S	RETAINING CAP 6 HOLES MAXIMUN LIFE	
12	CS60432	DOUBLE POINTED SPACERS (FOR USE WITH ITEM 5 AND 7 ONLY)	
N/S	CS60368	WRENCH FOR ELECTRODE	
Α	CS09630CX	PT-40 70° HAND TORCH 4 m (12.5 ft) LEADS COAXIAL CABLE	
	CS09631CX	PT-40 70° HAND TORCH 6 m (20 ft) LEADS COAXIAL CABLE	
	CS09685CX	PT-40 70° LEAD ASSEMBLY 4 m (12.5 ft) LENGTH COAXIAL CABLE	
	CS09686CX	PT-40 70° LEAD ASSEMBLY 6 m (20 ft) LENGTH COAXIAL CABLE	
В	CS09632CX	PT-40 70° HAND TORCH 4 m (12.5 ft) LEADS COAXIAL CABLE	
	CS09633CX	PT-40 70° HAND TORCH 6 m (20 ft) LEADS COAXIAL CABLE	
	CS09687CX	PT-40 70° LEAD ASSEMBLY 4 m (12.5 ft) LENGTH COAXIAL CABLE	
	CS09688CX	PT-40 70° LEAD ASSEMBLY 6 m (20 ft) LENGTH COAXIAL CABLE	
13	CS52536	ELECTRODE	
14	CS51315.09	TIP CONTAC CUTTING Ø0.9 30-40A	
15	CS52531	ELECTRODE	
16	CS51316.06	TIP CONTAC CUTTING Ø0.65 10-20A	
	CS51316	TIP CONTAC CUTTING Ø0.8 20-30A	
	CS51316.09	TIP CONTAC CUTTING Ø0.9 30-40A	
17	CS52532	EXTENDED ELECTRODE	
18	CS51317.09	EXTENDED TIP CONTAC CUTTING Ø0.9 30-40A	
19	CS60431	DOUBLE POINTED SPACERS (FOR USE WITH ITEM 16 ONLY)	
N/S	CS51866	CIRCLE CUTTING ATTACHMENT	